




Precision Plumbing Products

"Specify with Confidence - Install with Pride"

MM-500ST WATER HAMMER ARRESTOR

www.pppinc.net

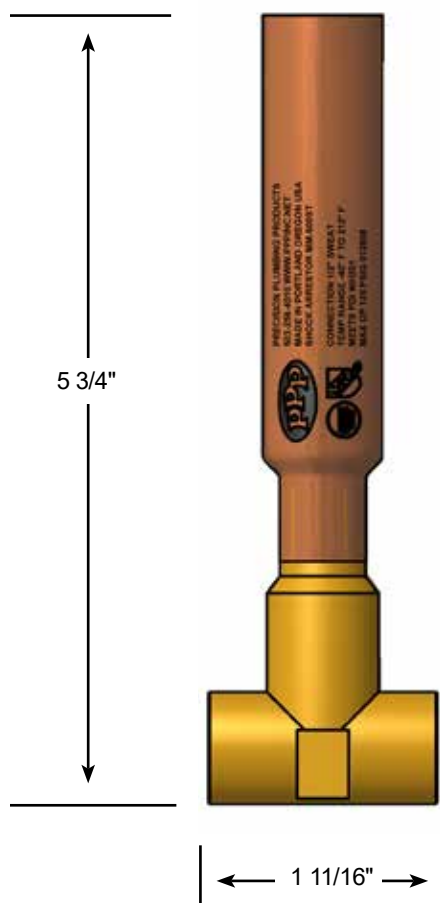

INTERNAL
PRECHARGE
60 PSIG

3/4" TYPE "L"
COPPER

1/2" SWEAT

INSTALLATION: May be installed in new or existing plumbing systems with a standard pipe tee.

MAINTENANCE: Maintenance free – the piston is the only moving part.

TEMPERATURE RANGE: 32°F to + 212°F (0°C to + 100°C)

CONSTRUCTION: Barrel-fabricated of type "L" hard drawn copper.

Cap: Brass.

Piston: Polycarbonate Dow Calibre 2061-15 MFR.

Seals: "O"rings: EPDM.

Seal Lubricant: Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

OPERATING PRESSURE: Designed to operate on all domestic and commercial systems.

Normal operating pressure: 35 to 125 PSIG.

Max Spike pressure: 250 PSIG.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____



Precision Plumbing Products
Division of JL Industries, Inc.

802 SE 199th Avenue
Portland, Oregon 97233

T (503) 256-4010
F (503) 253-8165

www.pppinc.net

NSF/ANSI 372-2024 Certified Lead Free
NSF/ANSI 61 Certified

Patent No 3,633,627



Rev 09/26