




# Precision Plumbing Products

*"Specify with Confidence - Install with Pride"*

## MINI - MAX "AA" COMPRESSION "T" MINI WATER HAMMER ARRESTOR MM-5003-CPT

www.pppinc.net

**3/8" COMPRESSION "T"**

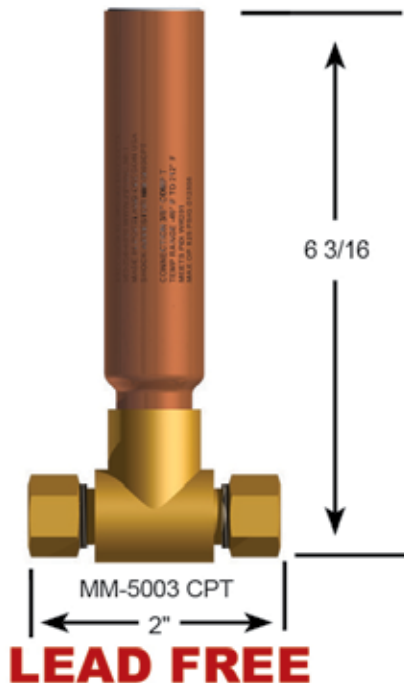

**INSTALLATION:** May be installed in new or existing plumbing systems with a standard pipe tee.

**MAINTENANCE:** Maintenance free – the piston is the only moving part.

**TEMPERATURE RANGE:** 32°F to + 212°F (0°C to + 100°C)

**CONSTRUCTION:** Barrel-fabricated of type "L" hard drawn copper.

**Cap:** Machined of free turning brass.

**Tee:** Attached to barrel with 95-5 solder.

**Piston:** Polycarbonate Dow Calibre 2061-15 MFR.

**Seals:** "O"rings: EPDM.

**Seal Lubricant:** Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

**OPERATING PRESSURE:** Designed to operate on all domestic and commercial systems.  
Normal operating pressure 35 to 125 PSI  
Max Spike pressure 250 PSI.

PROJECT SUBMITTAL

Project: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Date Submitted: \_\_\_\_\_

Prepared By: \_\_\_\_\_

### Precision Plumbing Products

Division of JL Industries, Inc.

802 SE 199th Avenue  
Portland, Oregon 97218

T (503) 256-4010  
F (503) 253-8165

www.pppinc.net



Patent No 3,633,627

NSF/ANSI 372-2024 Certified Lead Free

NSF/ANSI 61 Certified



Rev 09/26